

# Fresh air valve

# ULA



## Description

ULA is a circular fresh air valve with telescopic wall sleeve for installation in an external wall close to the roof. ULA has an integral damper that can be operated using a pull-cord. The special telescopic wall sleeve makes it possible to install the valve in the wall without screws. The two telescopic parts are screwed together through the wall. ULA can be supplied with two types of external grille, and type 1 is also equipped with detachable insect netting. ULA is supplied with sound insulation inserts in two thicknesses. The material is fibre-free, washable and easy to remove. ULA is supplied with an EU-3 filter. The insect netting and sound insulation can be easily removed from inside.

- Easy to clean
- Fits wall thicknesses from 270 mm to 430 mm
- Can be supplied with sound insulation inserts in two thicknesses
- External casing in several colours and materials

## Maintenance


Front plate, filter and insulation can be removed to enable cleaning.

## Accessories



ULZ-1: Extra sound insulation (wall thickness > 300 mm)  
 ULZ-2: Cover flange Ø 241 mm, galvanised steel, white/grey  
 ULZ-3: Filter  
 ULZ-4: Insect netting  
 ULAK: Type 1, with copper casing  
 ULAL: Type 1, with aluminium casing  
 ULAG: Type 1, with galvanised casing

## Ordering example


Product	ULA	a
Type		
Outside grille 1,2		

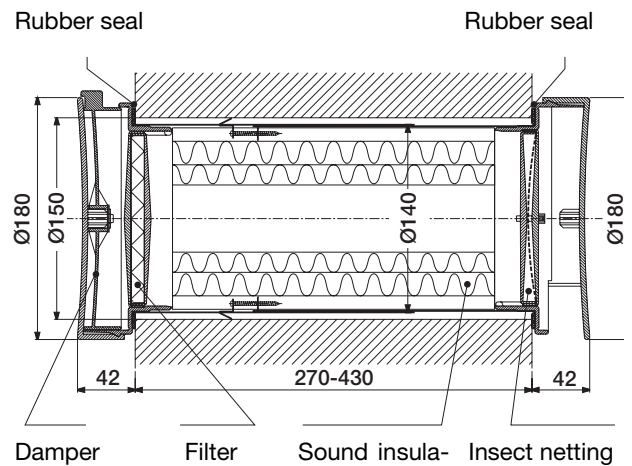

External grille type 1

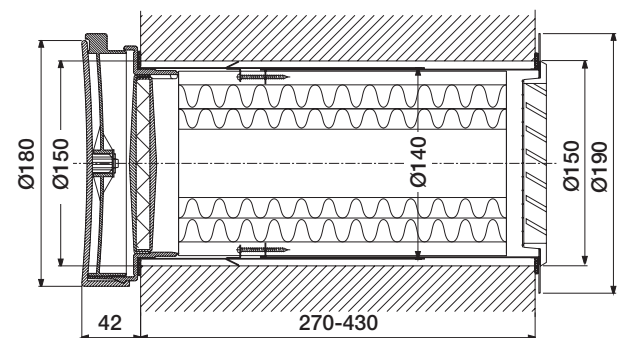

External grille type 2



ULA is supplied with 2-part sound insulation insert Ø140/Ø50 mm. If greater capacity is required, remove the inner section of the insulation. Sound reduction will decrease by 3 dB (see tech. data). Valves with a shorter design for installation in lightweight structures can be supplied on request. However, this will result in reduced sound insulation.

## Materials and finish


Internal section:	Colourfast plastic
Standard colour:	White
External grille type 1:	Colourfast plastic, grey
External grille type 2:	Aluminium
Standard finish:	Powder-coated, Grey RAL 7040
Telescopic tube:	Galvanised steel
Sound insulation:	Foam plastic

# Fresh air valve


# ULA

## Technical data

### Capacity

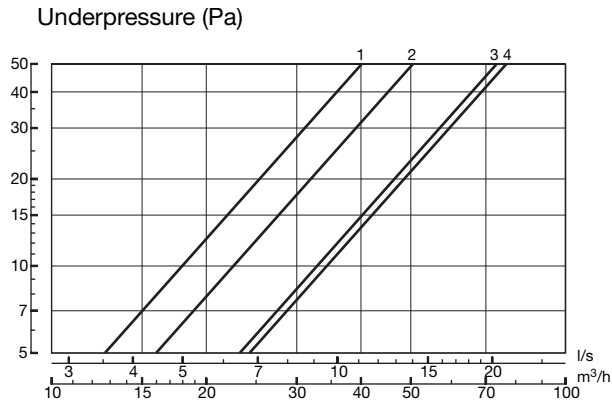


Curve	Filter	Sound-Insulation [mm]	free opening cm <sup>2</sup>	Equivalent area cm <sup>2</sup>
1	EU-3	Ø140 / Ø50	20	21
2	EU-3	Ø140 / Ø80	50	26
2	-	Ø140 / Ø50	20	26
3	-	Ø140 / Ø80	50	38
4	-	-	50	39

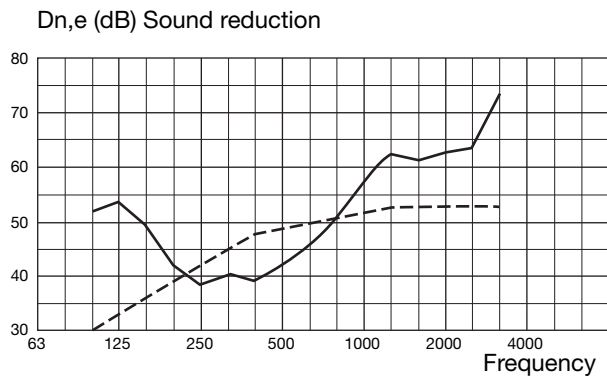


**ULA with sound insulation Ø140/Ø50**  
**wall thickness: 300 mm**

Weighted element-normalised level difference  
 Dn,e,w = 49 dB, Δmax = 8.3 dB

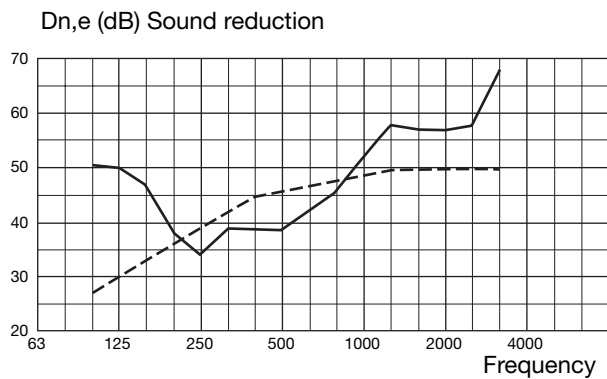

**ULA with sound insulation Ø140/Ø80**  
**wall thickness: 300 mm**

Weighted element-normalised level difference  
 Dn,e,w = 46 dB, Δmax = 7.6 dB

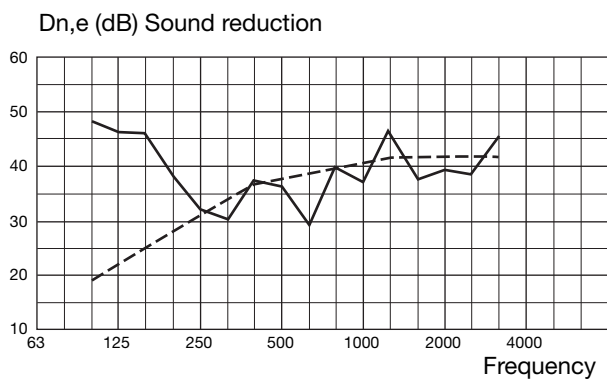


**ULA without sound insulation**  
**wall thickness: 300 mm**

Weighted element-normalised level difference  
 Dn,e,w = 38 dB, Δmax = 10.2 dB

# Fresh air valve

# ULA

## Technical data

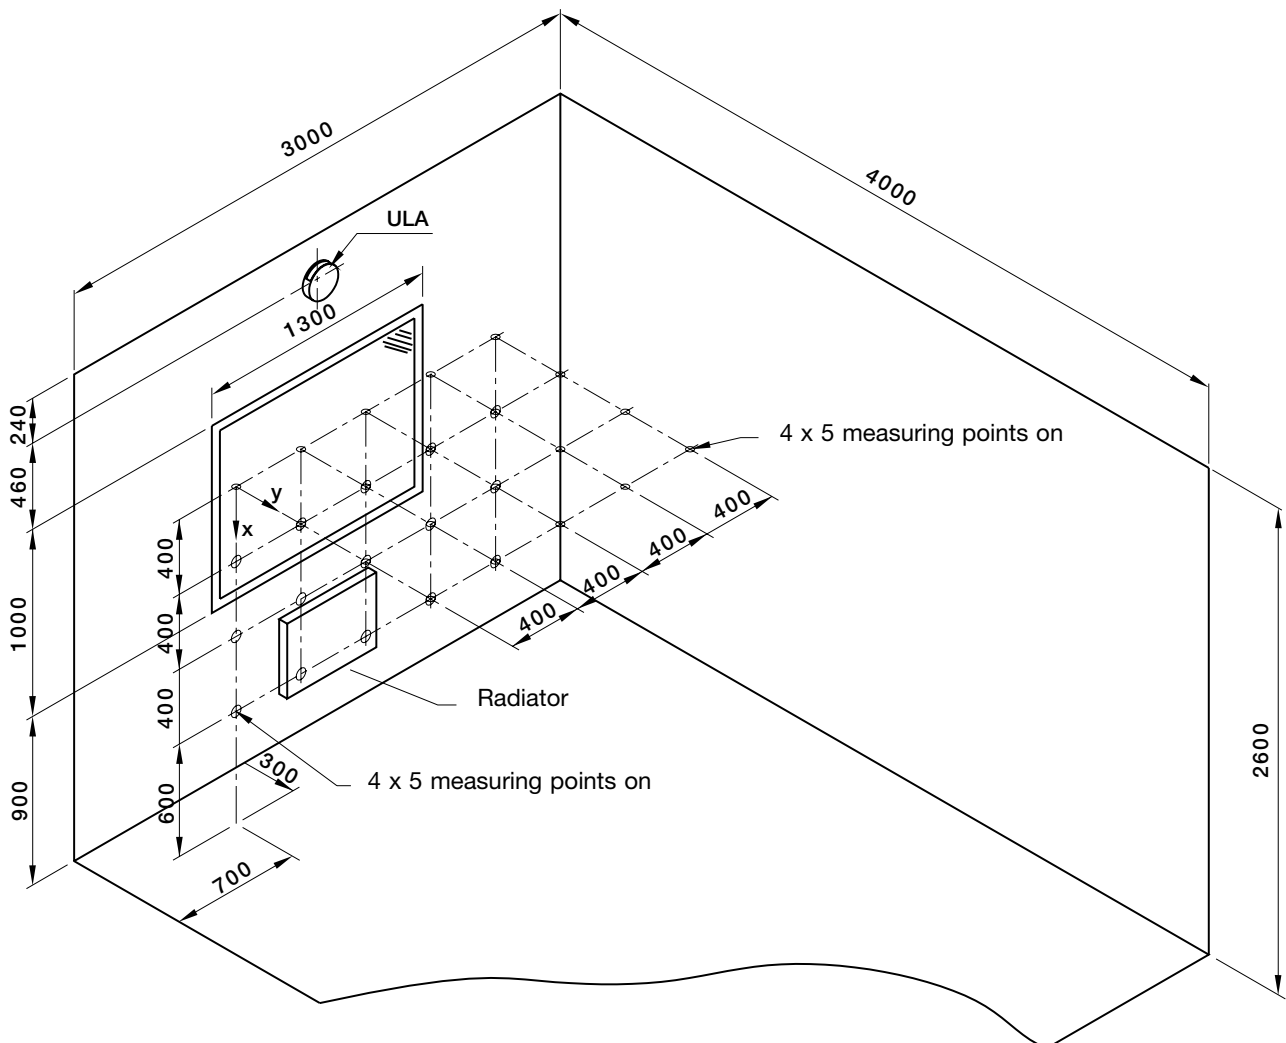

Air flow		Without radiator ( 500W )			radiator ( 500W )	
m <sup>3</sup> /h	l/s	Δt ( K )			Δt ( K )	
		0	-20	-40	-20	-40
20	5,6	<0,10	0,15	0,21	<0,10	0,10
30	8,3	<0,10	0,15	0,22	<0,10	0,17
40	11,1	0,10	0,15	0,22	0,10	0,18
50	13,9	0,13	0,15	-	0,11	-
60	16,7	0,14	0,15	-	0,11	-
70	19,4	0,14	0,15	-	0,13	-
100	28,0	0,15	0,23	-	0,13	-

The drawing above shows a trial set-up for determination of speeds in the occupied zone for different volumes of air and temperature differences. For trials with  $\Delta t = -40$  K, a window with  $U = 1.5$  W/m<sup>2</sup> was used. At  $-20$  K was  $U = 2.6$  W/m<sup>2</sup>.