

---

**PAX**<sup>®</sup>

# Pax Norte<sup>®</sup>

Fully automatic bathroom fan.  
Download the app for more  
functions and settings.



**Now also in  
matt black**

# PAX<sup>®</sup>

# Pax Norte<sup>®</sup> Innovation in every detail.

## **Pax Norte is ready to work in silence.**

It should be easy to fit a bathroom fan. And with Pax Norte, it couldn't be easier. Take it out of the box, connect it and Norte is ready to start work.

When Pax Norte is delivered, it is preset to be an automatic bathroom fan. The fan's basic setting is for continuous operation at low speed with moisture and light sensors activated. This ensures constant healthy air circulation and a better indoor climate throughout the house.

Pax Norte is extremely quiet and, of course, it's approved for use in wet rooms.

## **The app allows you to select several functions and make adjustments.**

If you download Pax's intelligent app "Pax Wireless" you can unlock your Norte and have the opportunity to choose between 5 different preset models or profiles depending on your need of functionality.

## **More adjustments and settings.**

With the app you get a whole range of different functions such as a smart calendar function, which allows you to activate your Norte according to which day it is. Or boost mode, airing function, constant flow or the option to simply use the fan as a heat distributor.

## **Innovation in every detail.**

Pax Norte was developed and is manufactured in Sweden. As usual, we've taken an uncompromising approach to materials, the environment and quality. Norte is full of state-of-the-art control technology and its performance is more than 20% better than previous models. Pax Norte also offers minimum energy consumption and is very easy to clean.

## **A fan with unexpected possibilities.**

Pax Norte was developed for several markets other than just the household market. The integrated 12 volt input makes it possible to use the fan in boats and motorhomes, for example, without draining the batteries.

Pax Norte may be one of the most versatile fans we have ever produced. And, as with all Pax products, every single fan has undergone stringent quality and safety tests. This is why we provide a 5-year warranty on your Pax Norte.

## **What you get with a Pax Norte<sup>®</sup>:**

- 1. Fully automatic bathroom fan, ready to use in its default**
- 2. Choose between 5 preset profiles and have the opportunity to do more settings and adjustments via Pax app**
- 3. Easy to install and use**
- 4. Very quiet 17-20dB (A) 3m**
- 5. Effective, 110 m<sup>3</sup> / h free blowing**
- 6. Energy-saving, maximum 4 W**
- 7. Boost function**
- 8. Separate 12 V input**
- 9. Safe and secure. Each fan is thoroughly tested.**
- 10. Developed and manufactured in Sweden**

**Unpack and  
install, turn on,  
ready to use!**



The Pax app offers even more functions.



**Requirements for app functions:**

Check App Store or Google Play.

**5 preset profiles can be selected via the app "Pax Wireless":**



1. Norte Auto  
*(Continuous basic ventilation)*
2. Norte humidity-controlled  
*(Can be combined with backdraft shutter)*
3. Norte switch-operated, with run-on time  
*(Can be combined with backdraft shutter)*
4. Norte switch-operated on/off  
*(Can be combined with backdraft shutter)*
5. Norte heat distributor

**Adjustments/settings via app:**

- Flow adjustments
- Calendar function
- Forced ventilation
- Run-on time
- Start delay
- Luminous sensitivity
- Moisture sensitivity

Default setting; continuous operation, or select profile through Pax app.

Fully automatic fan with the option of app control.  
Choose between white or matt black design.

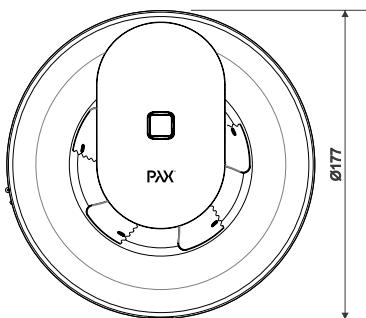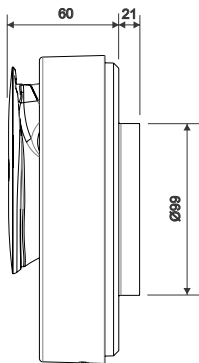

### Model

|  |  |  |
|--|--|--|
| Part number                                  | <b>Pax Norte<sup>®</sup> white</b><br>1560-1 | <b>Pax Norte<sup>®</sup> black</b><br>1561-1 |
| All-pole cut-out                             | Yes  | Yes  |
| Capacity, free blowing [m <sup>3</sup> /h]   | 110 m <sup>3</sup> /h                        | 110 m <sup>3</sup> /h                        |
| Capacity, free blowing [l/s]                 | 30   | 30   |
| Max. pressure [Pa]                           | 25Pa   | 25Pa   |
| Power consumption [W]                        | 4W   | 4W   |
| Sound pressure level [dB(A) 3 m], min. speed | 17-20 dB(A) 3 m                              | 17-20 dB(A) 3 m                              |
| Voltage/Frequency                            | 230V AC 50Hz / or 12V DC                     | 230V AC 50Hz / or 12V DC                     |
| Motor type, all mounted in ball bearings     | DC   | DC   |
| Bluetooth                                    | BTLE4  | BTLE4  |
| IP code                                      | IP44   | IP44   |
| Insulation class                             | Class II (does not require earth protection) | Class II (does not require earth protection) |
| Certificate                                  | S – Intertek                                 | S – Intertek                                 |
| Other markings                               | CE   | CE   |
| Duct dimension                               | Ø100-140 mm                                  | Ø100-140 mm                                  |
| Temperature range                            | 5-35   | 5-35   |
| Electrical installation                      | Qualified installation engineer              | Qualified installation engineer              |
| Unit weight [kg]                             | 0.38   | 0.38   |

Separate  
12 V input for  
example boat  
or caravan




RH%



Light




Timer



Speed 1, 2, 3



Bluetooth



Heat transfer

### Functions

Fully automatic. Three speed modes and a boost mode:

- Low speed (basic flow/basic ventilation).
- Medium speed (run-on via light sensor).
- High speed (activated via humidity sensor or started manually via switch).
- Boost mode, programmed or activated via app
- Airing function, connectible

### Location

Installed with own separate duct Ø100-140.

- with natural draught (ceiling).
- without natural draught (external wall).

**Multi-pole switch:** Integrated for 100-240 V AC wiring.

### Accessories

- Backdraught shutter 8127-1
  - Cover plate white 8143-6
  - Cover plate black 8143-8
- For duct dimensions Ø140-160

